


## ELECTROSTATIC SPRAY SYSTEM REFURBISHMENT



## SPRAY BAR

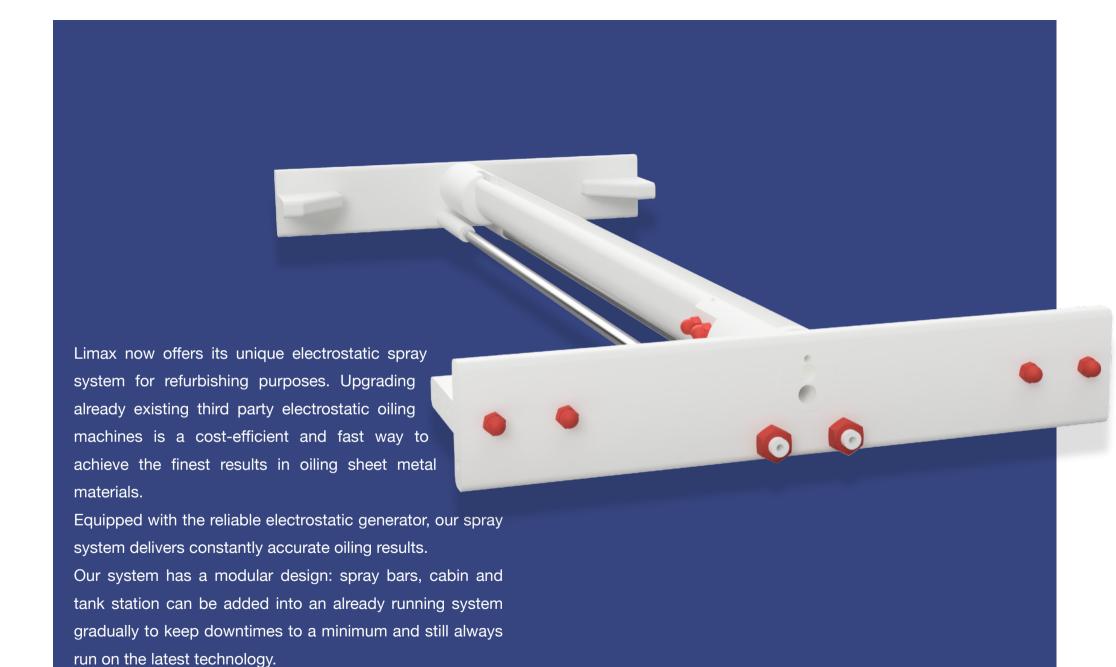

Spray Width	1.500 - 2.400 mm *
Oil Layer	0,2 - 3 g/m <sup>2</sup> *
Strip Speed	30 - 1.600 m/min
Width Adjustment	100 mm grids (50 mm upon request)
Medium	All anti-corrosion and deep drawing oils

<sup>\*</sup> different specifications possible

The new Limax Spray Bar is part of our versatile Electrostatic Oiling System and adopts perfectly to your production environment. Due to its dimensions and functionality it is the first choice for machine refurbishment in order to achieve improved oiling quality with less effort. Short delivery times and fast assembly guarantee prompt achievements. All Spray Bars for refurbishment purposes come with an individual mounting solution to fit to your existing infrastructure seamlessly.

The movable frame of the Spray Bar makes maintenance easy and fast.



Maintenance and Repairs

All components of the Limax Spray Bar can be maintained and cleaned by the enduser. This saves time and is the most cost efficient way to run an oiling system. In case of damage, Limax is able to supply the customer with individual spare parts without the need to exchange a whole component. Due to the modular design of the Spray Bar and our fast production and delivery capacity, the Oiling Systems downtimes will be reduced to a minimum.

Our Spray Bar comes with our compatible high-voltage system. Flawless oiling results, continuity and repeatability.



